



XTC Mirror Install on Kawasaki Ridge


Thank you for purchasing XTC Power Products Side View Mirrors with Lights Built in. The Amber Backlights can be used as marker lights or can be wired to be used as Turn Signals.

Please read the instructions fully and familiarize yourself with the components before starting the installation. The diagram below shows the overall system layout.


1. Remove the inside upper door panel and the outside plastic panel exposing the window and track
2. Using the mirror bracket, set it on the window frame as shown just below the weld and mark the mounting holes.



3. Drill the two 5/16" mounting holes and mount the mirror bracket using the supplied bolts and washers.

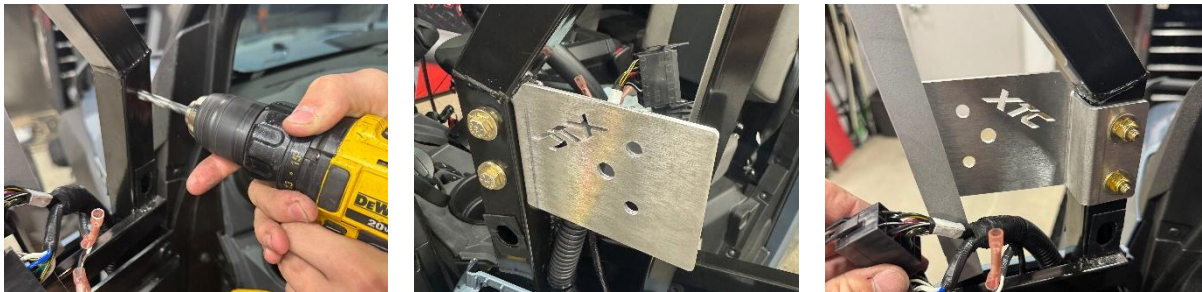

4. Reinstall the outer upper door plastics.
5. Drill the three 5/16" mounting holes.

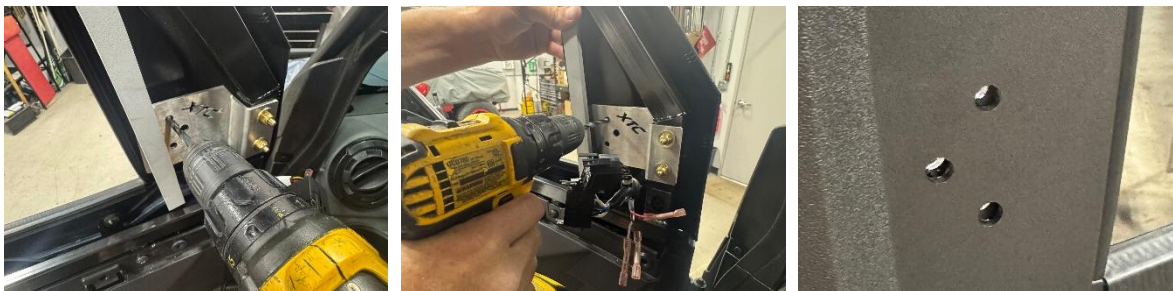

6. Install the outside flat bracket as shown and then the mirror mount with the provided M8 bolts and washers.



7. Run the mirror wire through the extra hole. Attach 3 wires to the mirror, Red for white light, White for backlight and black for ground. Run the wire down the door to the factory wire harness. Zip Tie the Harness to the factory wires and run to power.



8. Reinstall the inside upper door panel.

9. Verify operation.

We can be reached by email at support@xtcpowerproducts.com

XTC Power Products
A Division of XTC Motorsports LLC
380 E Comstock Dr.
Chandler AZ 85225
480-558-8588

www.xtcpowerproducts.com

*Disclaimer: This kit is intended for off road use only and XTC Motorsports claims no responsibility for its use. It is up to the purchaser to make sure it complies with all Federal, State and Local laws. R1
Copyright © 2025 XTC MOTORSPORTS LLC, all rights reserved.