



# TSS to Polaris Instrument Cluster Turn Indicator Interface

Thank you for purchasing XTC Power Products TSS-POL-INS. This item is from our Plug & Play™ product line, no wires to cut, no crimping, just plug it in! Once installed the OEM Turn LED will Flash when the Turn System is Activated.

**Note: This Item does not work on the new Analog/Digital Instrument Cluster.**

For more details on installation go to [www.xtcinstall.com](http://www.xtcinstall.com)


Please read the instructions fully and familiarize yourself with the components before starting the install.

**Note: The connector has power in it, disconnect the battery during installation.**


1. **Unplug Connector** – From the rear of the Instrument Cluster



2. **Remove Connector Lock** – Using a small screw driver push in on both sides of the at the white connector shown below and slide lock off

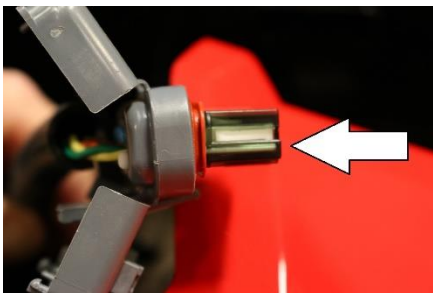


3. **Remove Plugs** – Using a pair of needle nose pliers remove the plugs from wire port 6 and 7.

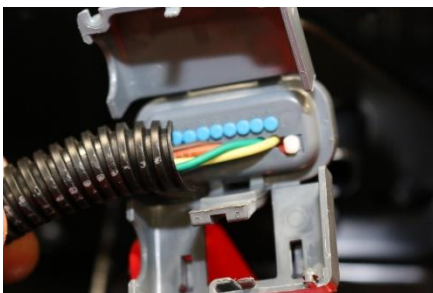


4. **Insert Wires** – Insert the Green Wire into the port 6, plug the yellow wire into port 7.



5. **Close Cover** – Run our adapter cord along side the OEM harness and snap shut, re-install plastic locking cover

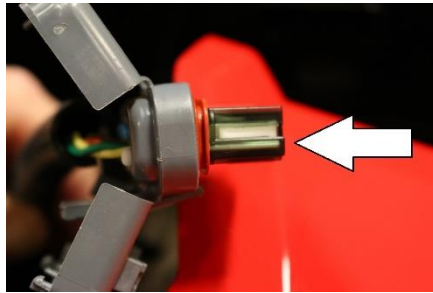

6. **Unplug** – the front harness from the TSS and insert the adapter in between the two connectors.

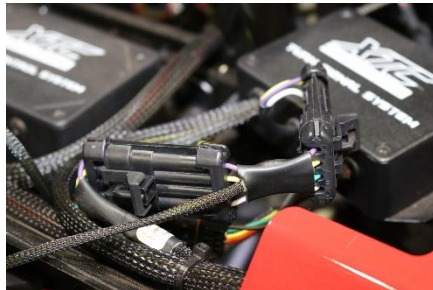

7. Hook the **battery** back up and test the operation of the system.

**For more details on installation go to [www.xtcinstall.com](http://www.xtcinstall.com).**  
We can also be reached by email at [support@xtcpowerproducts.com](mailto:support@xtcpowerproducts.com)

XTC Power Products  
A Division of XTC Motorsports LLC  
380 Comstock Dr.  
Chandler, AZ 85225  
480-558-8588  
[www.xtcpowerproducts.com](http://www.xtcpowerproducts.com)